

SACQUA SOURCE SA



UNDERWATER POOL LIGHT



WPLD-8R


Μικρού μεγέθους Επιτοίχιο Φωτιστικό LED για πισίνες/spa

⊖ ABS πλαστικό

⊖ Ø 128mm

⊖ Προσαρμογή με σωλήνα σύνδεσης 1,5".

- Υλικό: λευκό ABS πλαστικό.
- Διάμετρος: Ø 128mm.
- Πάχος προσώπου: 33mm.
- Χρώμα φωτισμού: Warm white, Cool white, Μπλε, RGB.
- 15 προγράμματα φωτισμού.
- 2m καλώδιο H07RN-F, μέγεθος 2x1mm².
- Θέση εγκατάστασης: τοιχία.
- Τύπος πισίνας: σκυροδέματος / liner / fiberglass.
- Προστασία UV & ανθεκτικότητα στα χημικά.
- Εύκολη εγκατάσταση και συντήρηση.
- Υποβρύχια εγκατάσταση.
- Βαθμός προστασίας: IP68.
- Πιστοποίηση: CE & RoHS.

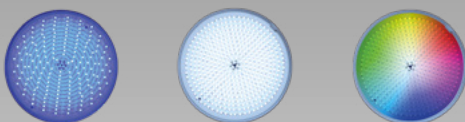



www.acquasource.gr

WPLD-8R, ΜΙΚΡΟΥ ΜΕΓΕΘΟΥΣ ΕΠΙΤΟΙΧΙΟ ΦΩΤΙΣΤΙΚΟ LED ΓΙΑ ΠΙΣΙΝΕΣ/SPA



Τεχνικά Χαρακτηριστικά	Μονόχρωμο			Πολύχρωμο
	WPLD-8R135-15WW	WPLD-8R135-15CW	WPLD-8R135-15B	WPLD-8R135-15M
Μοντέλο				
Χρώμα	Warm White	Cool White	Blue	RGB
Αριθμός LED	135	135	135	135
Kelvin	3000 K	6400 K	-	-
Lumen	800 lm	880 lm	180 lm	440 lm
Ισχύς κατανάλωσης	8 W	8 W	8 W	8 W
Τάση	12V-AC, 50/60Hz			
Τύπος/διάμετρος λάμπας	Λάμπα ρητίνης / SMD2835			
Γωνία ακτινοβολίας	120°	120°	120°	120°
Διάρκεια ζωής	50.000 hrs	50.000 hrs	50.000 hrs	50.000 hrs
Θερμοκρασία λειτουργίας	μέχρι και +40°C			
Καλώδιο H07RN-F	2 m - 2x1 mm ²			
Εγκατάσταση	Πισίνες σκυροδέματος / Liner / Fiberglass			

Διαστάσεις

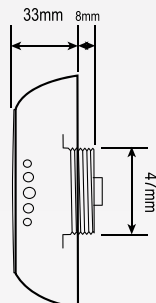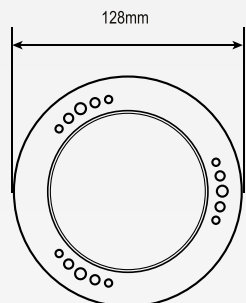

+ EXTRA ΕΞΟΠΛΙΣΜΟΣ



GL-001
Αδιάβροχη σύνδεση καλωδίου

* Η εγγύηση παύει να ισχύει αν υπάρχει οποιαδήποτε παρέμβαση στο καλώδιο. Εάν η σύνδεση του καλωδίου γίνει υποβρύχια, το εξάρτημα σύνδεσης πρέπει να είναι αδιάβροχο (χρησιμοποιήστε αδιάβροχη σύνδεση καλωδίου ή γεμίστε με εποξειδική κόλλα).

ACQUA SOURCE S.A.
Κατασκευαστής εξαρτημάτων πισίνας και σιντριβανιού



Σουρή 15, 121 31 Περιστέρι, Αθήνα
ΓΕΜΗ: 084197502000

Τηλ. & Fax: +30 210 5721058, +30 210 5771863, +30 210 5774345
E-mail: info@acquasource.gr • www.acquasource.gr

SACQUA SOURCE SA



UNDERWATER POOL LIGHT



WPLD-8R Small-size Wall Mounted Epoxy Pool/Spa Light

- ➊ ABS plastic
- ➋ Ø 128mm
- ➌ Installation in 1.5" pipe connector.

- Material: white ABS plastic.
- Diameter: Ø 128mm.
- Faceplate thickness: 33mm.
- Light colour: Warm white, cool white, blue, RGB.
- 15 color programs.
- 2m cable H07RN-F, cable size 2×1mm².
- Installation position: wall.
- Type of pool: concrete / liner / fiberglass.
- UV protection & chemical resistance.
- Easy installation & service.
- Underwater installation.
- IP rating: IP68.
- Certification: CE & RoHS.




www.acquasource.gr

WPLD-8R, SMALL-SIZE WALL MOUNTED EPOXY POOL/SPA LIGHT



Technical data	Monochrome			Multicolour
Model	WPLD-8R135-15WW	WPLD-8R135-15CW	WPLD-8R135-15B	WPLD-8R135-15M
Colour	Warm White	Cool White	Blue	RGB
No. of leds	135	135	135	135
Kelvin	3000 K	6400 K	-	-
Lumen	800 lm	880 lm	180 lm	440 lm
Power consumption	8 W	8 W	8 W	8 W
Voltage	12V-AC, 50/60Hz			
Bulb type/diameter	Resin filled / SMD2835			
Radiation angle	120°	120°	120°	120°
Lifespan	50.000 hrs	50.000 hrs	50.000 hrs	50.000 hrs
Operating temperature	up to +40°C			
Cable H07RN-F	2 m - 2x1 mm ²			
Installation	Concrete / Liner / Fiberglass pools			

Dimensions

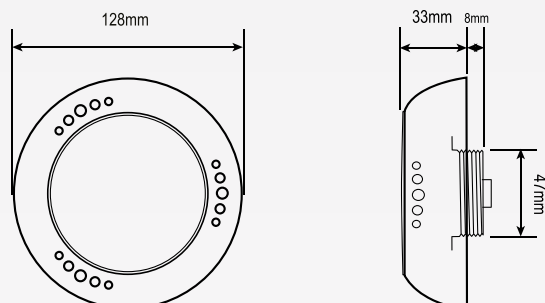

+ EXTRA EQUIPMENT



GL-001
Waterproof cable gland

* The warranty expires if the cable is damaged. If the cable connection is done underwater, the connection part must be **waterproof** protected (use waterproof cable gland or fill with epoxy glue). Otherwise, the water will come in the lamp through the wires.

ACQUA SOURCE S.A.
Manufacturer of swimming pool and fountain products

