



4 solutions in 1

FOR POOLS UP TO 25m³

Circulation


Filtration

Heating

Treating

4 solutions in 1

FOR POOLS UP TO 25m³

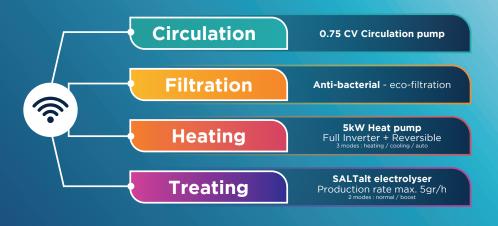

- **Ø** EASY TO INSTALL
- WIFI CONNECTION
- **⊘** COMPACT & EFFICIENT
- **O** CENTRALIZED USE



CONNECT THROUGH WIFI AND CONTROL THROUGH YOUR SMARTPHONE APPLICATION

- Chose your ideal temperature
- Adjust circulation and filtration
- Manage your salt electrolyser
- Program your use





And if you made life easier for yourself?

Do you feel overwhelmed with all the equipment needed to keep your pool clean and functional? Poolex has the answer.

The Poolican, an intuitive device, combines the three essentials for a healthy pool. And it goes even further with a 4th element that ensures the comfort of users with water that is always at the right temperature: the heat pump!

The treatment of your pool is entirely taken care of by a single device!

The Poolican is a compact device that is placed near the pool and plugged into a mains socket. Inside, you will find a circulation pump, a cartridge filter, a salt electrolyser and a 5kW Full Inverter and reversible heat pump. Once installed, you can easily control your pool from your smartphone.



TOUCH SCREEN

HEAT PUMP



SALT ELECTROLYSER



CIRCULATION



FILTRATION





Would you like to adopt a more civic-minded routine? Poolex accompanies you in your approach.



Thanks to the electrolyser, the treatment of your pool is more natural, free from the disadvantages of chemicals. The heat pump is equipped with Full Inverter functionality for continuous operation without any peak in consumption, which considerably reduces your energy consumption.

TECHNICAL CHARACTERISTICS

GENERAL		
Swimming pool volume	25 m ³	
Power supply	230 V - 50 Hz	
Max. power	1.25 kW	
Connections	32 / 38 mm	
Product dimensions	805 x 405 x 595 mm	
Noise level at 10m	≤ 35 dB	
Warranty	2 years	

THE ULTRA COMPACT TECHNICAL ROOM
Poolican Sports 40.5 cm
80.5 cm

5KW HEAT PUMP		
Air 26°C / Water 26°C	Capacity	5 kW
	Power consumption	0.91 kW
	СОР	5.5
Temperature	range	15 / 40°C
Operating range		-7 / 43°C
Refrigerant		R32
Compressor type		Rotary
Operates		Heating / Cooling / Auto

SALT ELECTROLYSER		
Salinity	3.5 g/l	
Max. production level	5 g/l	
Cell cleaning	Polarity inversion	
Operating modes	2 modes: normal / boost	

FILTRATION

Anti-bacterial filter D127 x H235

Pureflow as an option

CIRCULATION		
Flow	2 - 4 m ³ /h	
Capacity	0,75 hp	



